

Dual N-Channel Enhancement Mode MOSFET

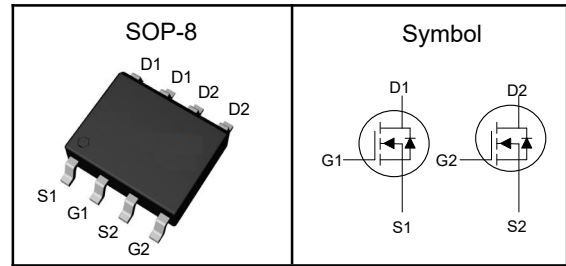
Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant
- 100% UIS and Rg Tested

Applications

- Power Management in Desktop Computer
- DC/DC Converters

Pin Description



V_{DSS}	30	V
$R_{DS(ON)-Typ}$	18.5	m Ω
I_D	8	A

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
V_{DSS}	Drain-Source Voltage	30	V
V_{GSS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy ^③	20	mJ
$I_{DM}^{①}$	Pulse Drain Current Tested	40	A
I_D	Continuous Drain Current	$T_A=25^\circ\text{C}$ 8	A
P_D	Maximum Power Dissipation	$T_A=25^\circ\text{C}$ 1.7	W

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ₁ (Steady State)	74	$^\circ\text{C/W}$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150 $^\circ\text{C}$.

Note ③ : Surface Mounted on 1in² FR-4 board with 1oz.



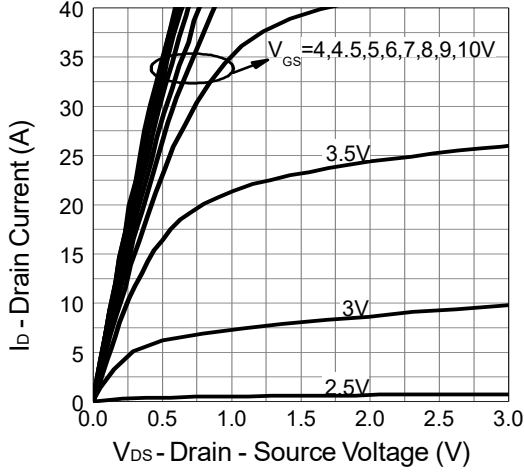
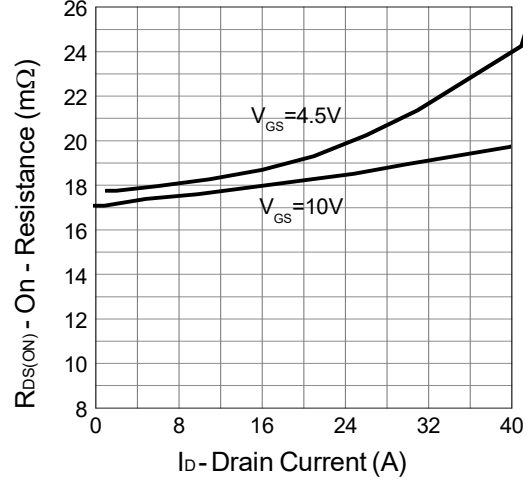
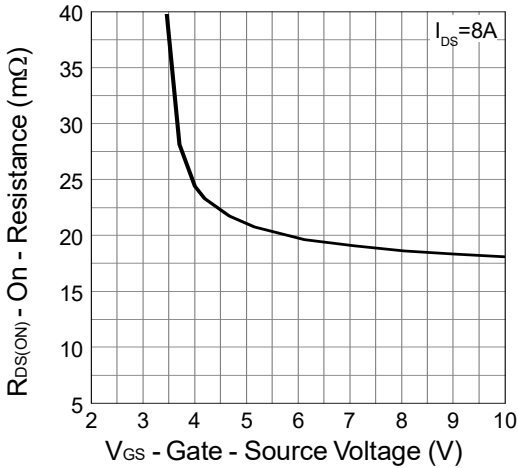
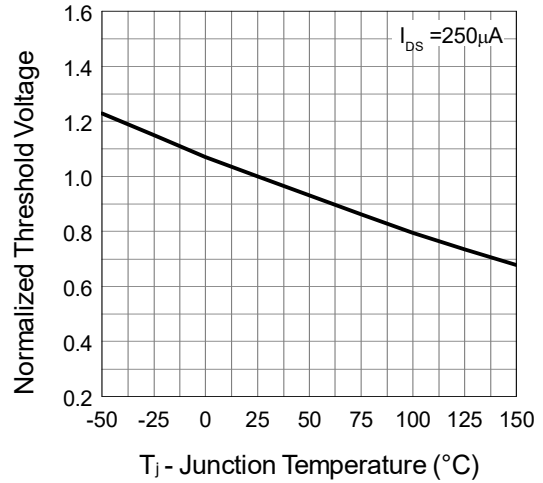
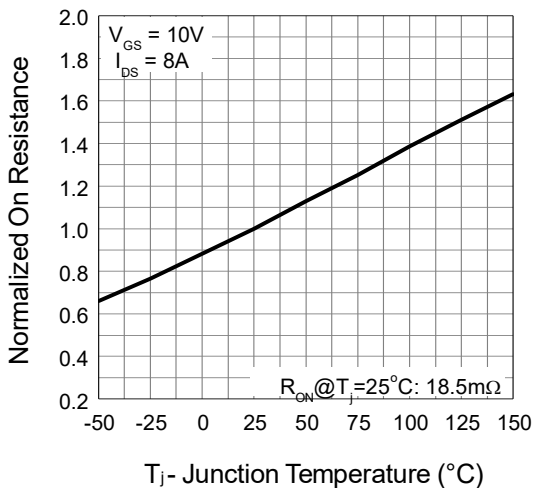
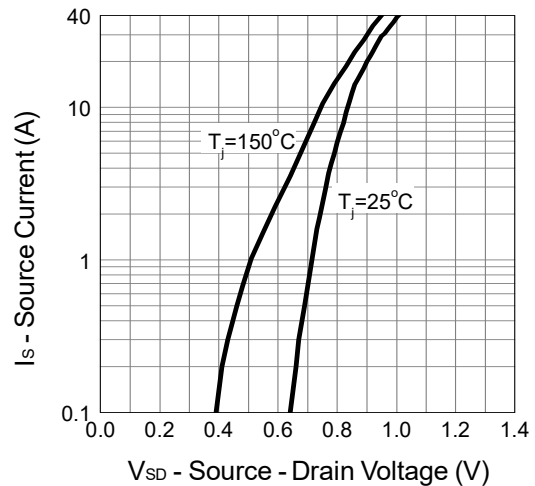
Dual N-Channel Enhancement Mode MOSFET

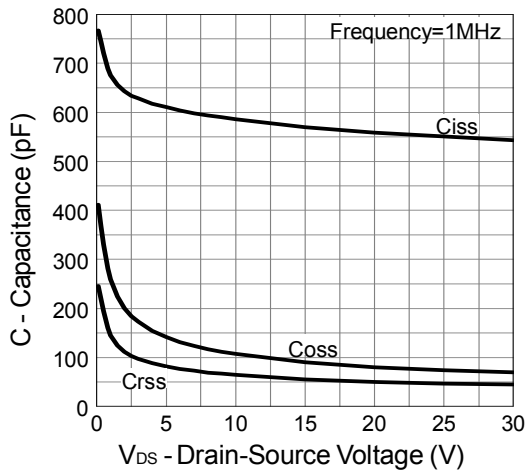
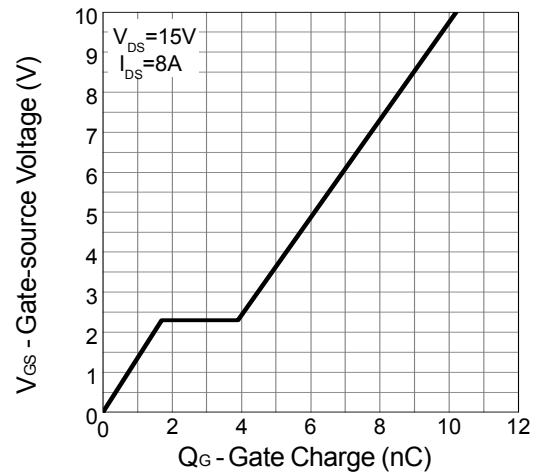
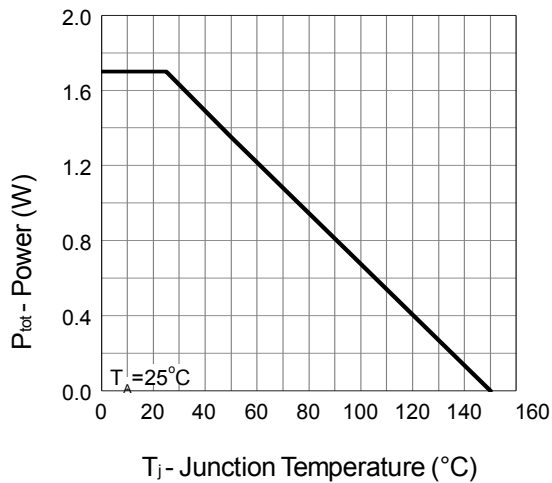
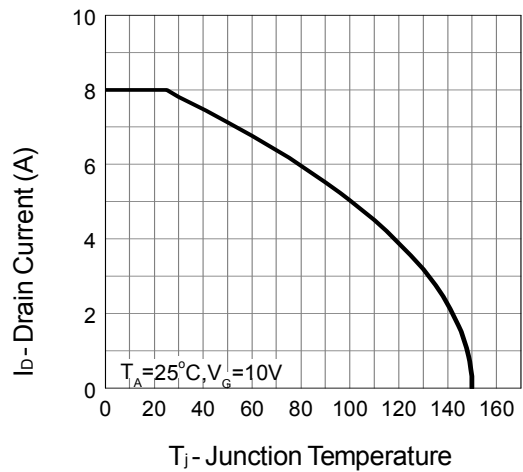
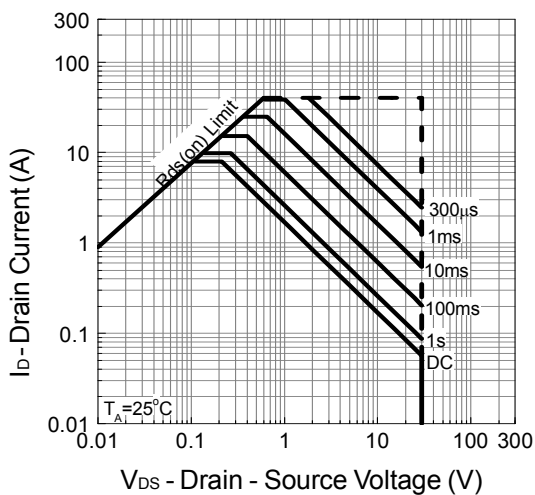
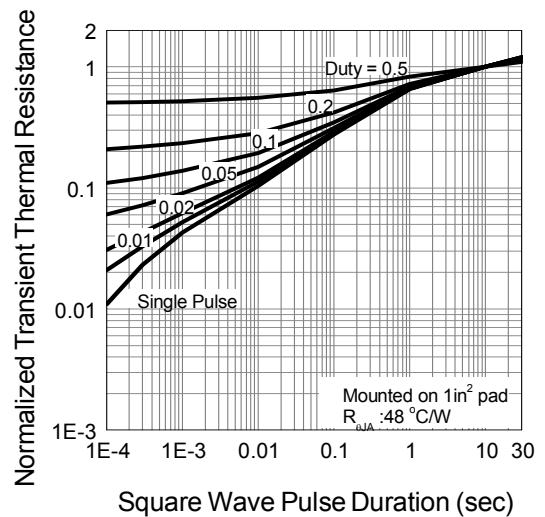
Electrical Characteristics ($T_J=25^{\circ}\text{C}$, Unless Otherwise Noted)

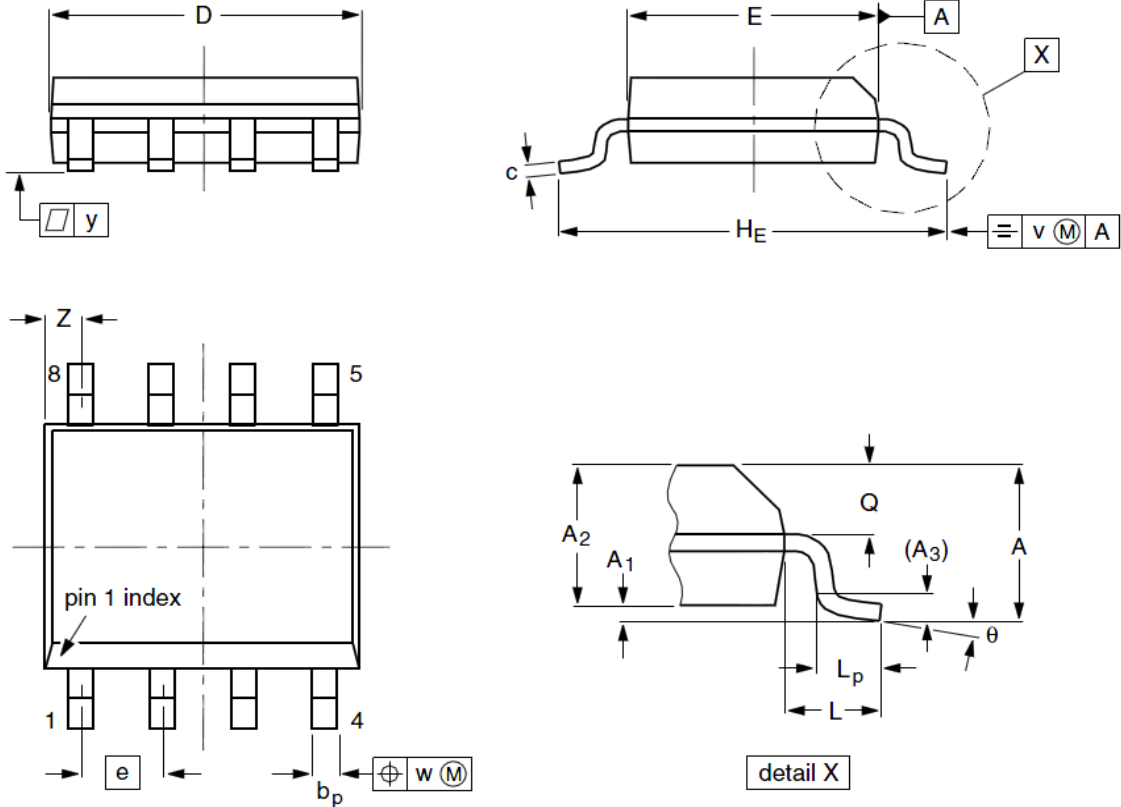
Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	30	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=24V, V_{GS}=0V$	---	---	1	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	0.6	---	1.5	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS}=10V, I_D=8A$	---	18.5	23	m Ω
		$V_{GS}=4.5V, I_D=7A$	---	25	27	
g_{fs}	Forward Transconductance	$V_{DS}=5V, I_D=8A$	---	32	---	S
Dynamic Characteristics ^⑤						
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=15V, \text{Freq.}=1\text{MHz}$	---	583	---	pF
C_{oss}	Output Capacitance		---	95	---	
C_{rss}	Reverse Transfer Capacitance		---	55	---	
$T_{d(on)}$	Turn-on Delay Time	$V_{DD}=15V, V_{GS}=10V, R_G=6\Omega, I_D=1A$	---	6	---	nS
T_r	Turn-on Rise Time		---	10	---	
$T_{d(off)}$	Turn-off Delay Time		---	17	---	
T_f	Turn-off Fall Time		---	4	---	
Q_g	Total Gate Charge	$V_{DS}=15V, V_{GS}=10V, I_D=10A$	---	10.6	---	nC
Q_{gs}	Gate-Source Charge		---	1.7	---	
Q_{gd}	Gate-Drain Charge		---	2.2	---	
Source-Drain Characteristics ($T_J=25^{\circ}\text{C}$)						
V_{SD}	Diode Forward Voltage ^②	$V_{GS}=0V, I_S=1A, T_J=25^{\circ}\text{C}$	---	0.7	1.1	V
t_{rr}	Reverse Recovery Time	$I_F=1A, di/dt=100A/\mu s, T_J=25^{\circ}\text{C}$	---	15.5	---	nS
Q_{rr}	Reverse Recovery Charge		---	6.8	---	nC

Note ④ : Pulse test (pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$).

Note ⑤ : Guaranteed by design, not subject to production testing.

Dual N-Channel Enhancement Mode MOSFET
Typical Characteristics
Output Characteristics

Drain-Source On Resistance

Gate-Source On Resistance

Gate Threshold Voltage

Drain-Source On Resistance

Source-Drain Diode Forward


Dual N-Channel Enhancement Mode MOSFET
Capacitance

Gate Charge

Power Dissipation

Drain Current

Safe Operation Area

Thermal Transient Impedance


Dual N-Channel Enhancement Mode MOSFET
SOP-8 Package Outline Data


Symbol	Dimensions (unit:mm)			Symbol	Dimensions (unit:mm)		
	Min	Typ	Max		Min	Typ	Max
A	1.35	1.55	1.75	A₁	0.10	0.18	0.25
A₂	1.25	1.45	1.65	A₃	--	0.25	--
b_p	0.36	0.42	0.51	c	0.19	0.22	0.25
D	4.70	4.92	5.10	E	3.80	3.90	4.00
e	--	1.27	--	H_E	5.80	6.00	6.20
L	--	1.05	--	L_p	0.40	0.68	1.00
Q	0.60	0.65	0.73	v	--	0.25	--
w	--	0.25	--	y	--	0.10	--
Z	0.30	0.50	0.70	θ	0°		8°