

P-Channel Enhancement Mode MOSFET

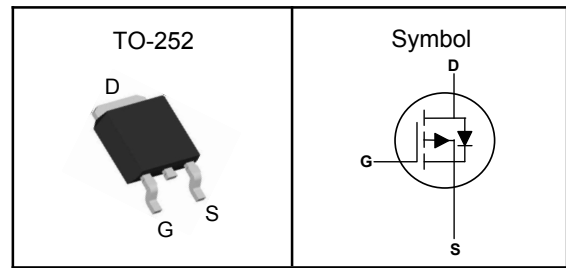
Features

- Low $R_{ds(on)}$ for low conduction loss
- Reliable and Rugged
- ROHS Compliant & Halogen-Free

Applications

- Power Management in Desktop Computer
- DC/DC Converters

Pin Description



V_{bss}	-30	V
$R_{ds(ON)-Typ}$	8	$m\Omega$
I_D	-57	A

Absolute Maximum Ratings ($T_C=25^\circ C$, Unless Otherwise Noted)

Symbol	Parameter	P-Channel	Unit
V_{bss}	Drain-Source Voltage	-30	V
V_{GSS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	-55 to 150	$^\circ C$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
$I_{DM}^{①}$	Pulse Drain Current Tested	-180	A
I_D	Continuous Drain Current	-57	A
P_D	Maximum Power Dissipation	52.1	W
E_{AS}	Single Pulse Avalanche Energy	408	mJ

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	62	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case ₁	2.4	$^\circ C/W$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature $150^\circ C$.

Note ③ : Surface Mounted on $1in^2$ FR-4 board with 1oz.



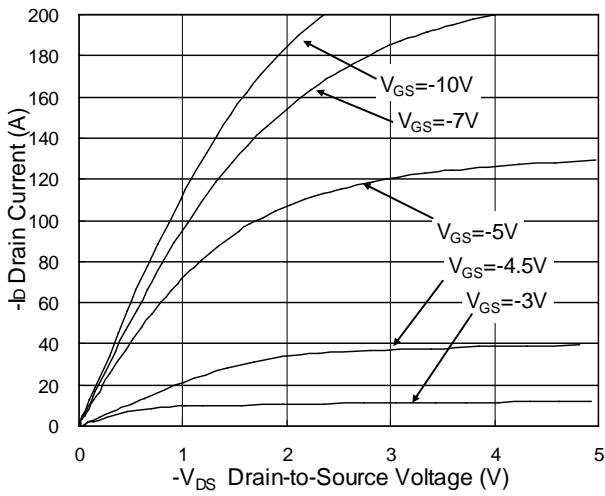
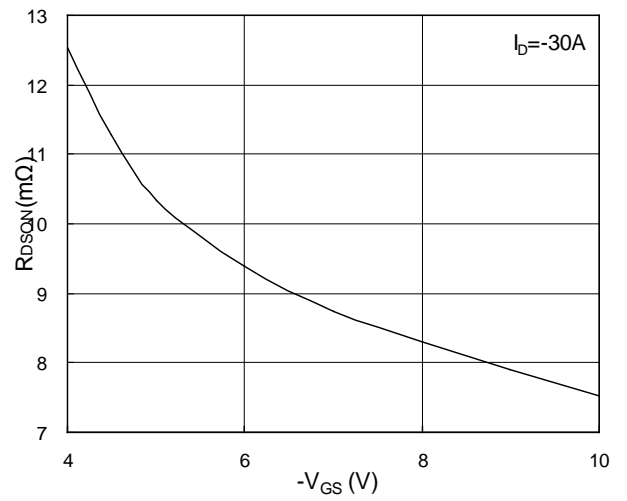
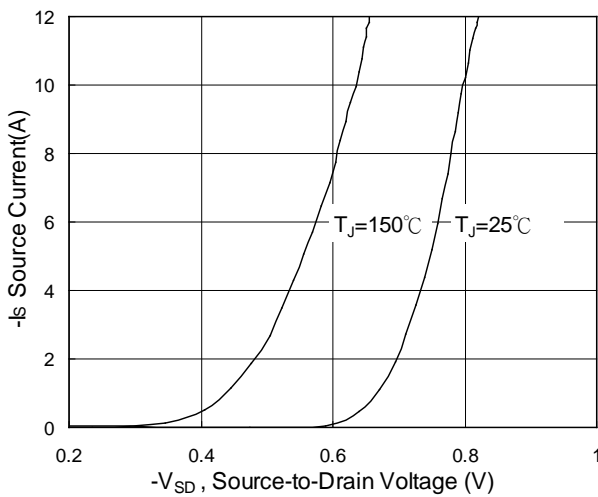
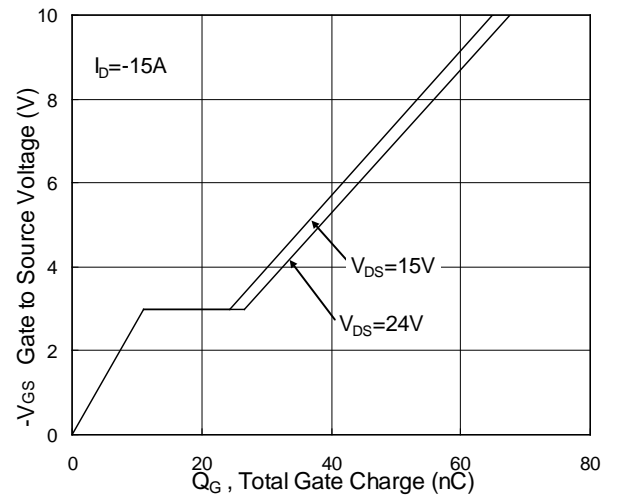
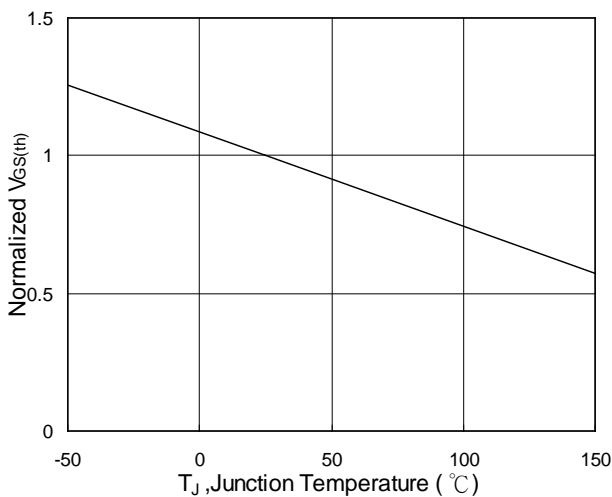
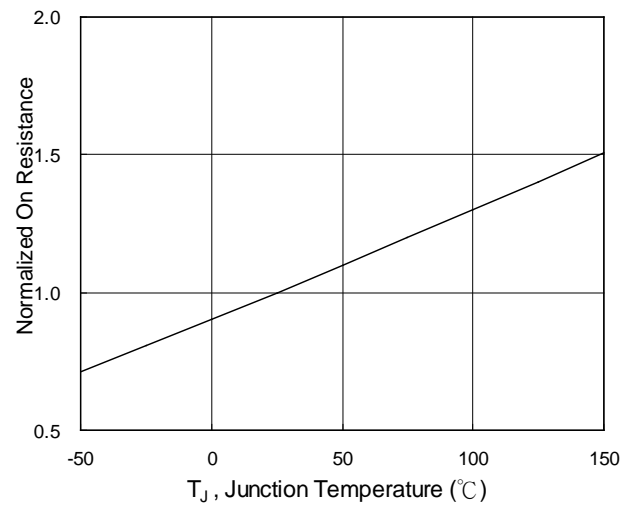
P-Channel Enhancement Mode MOSFET

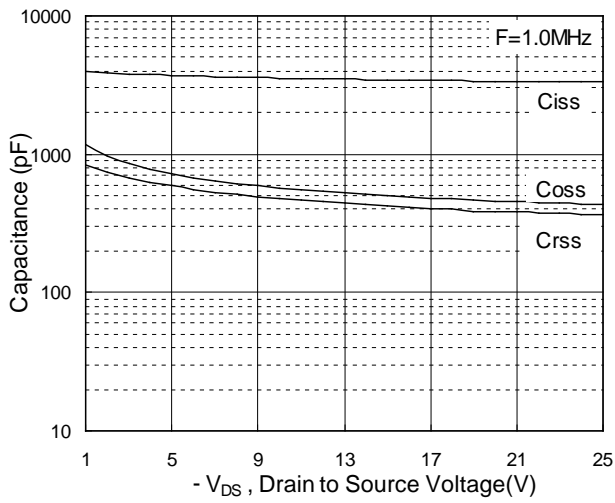
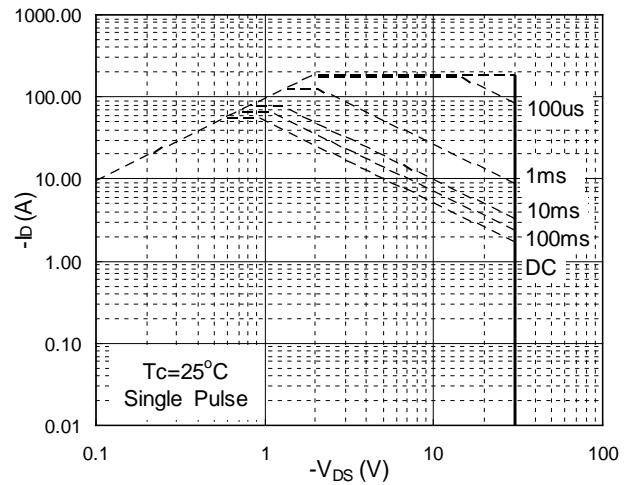
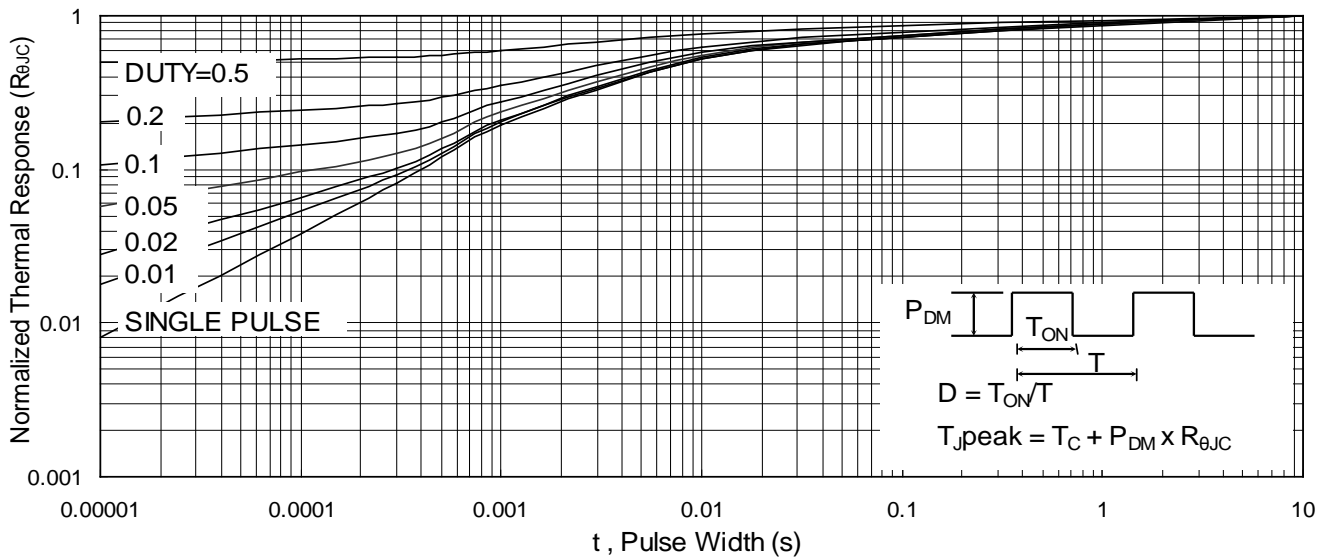
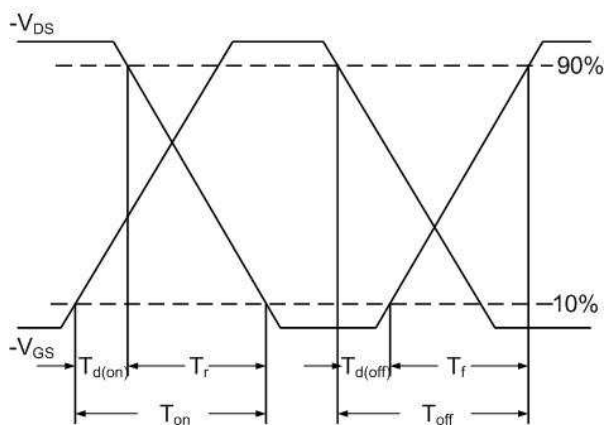
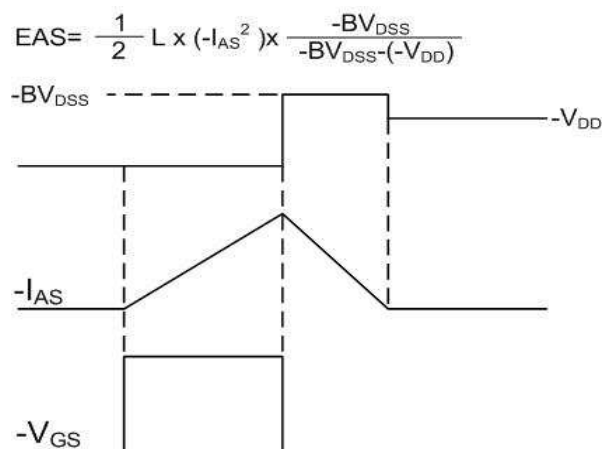
Electrical Characteristics ($T_J=25^{\circ}\text{C}$, Unless Otherwise Noted)

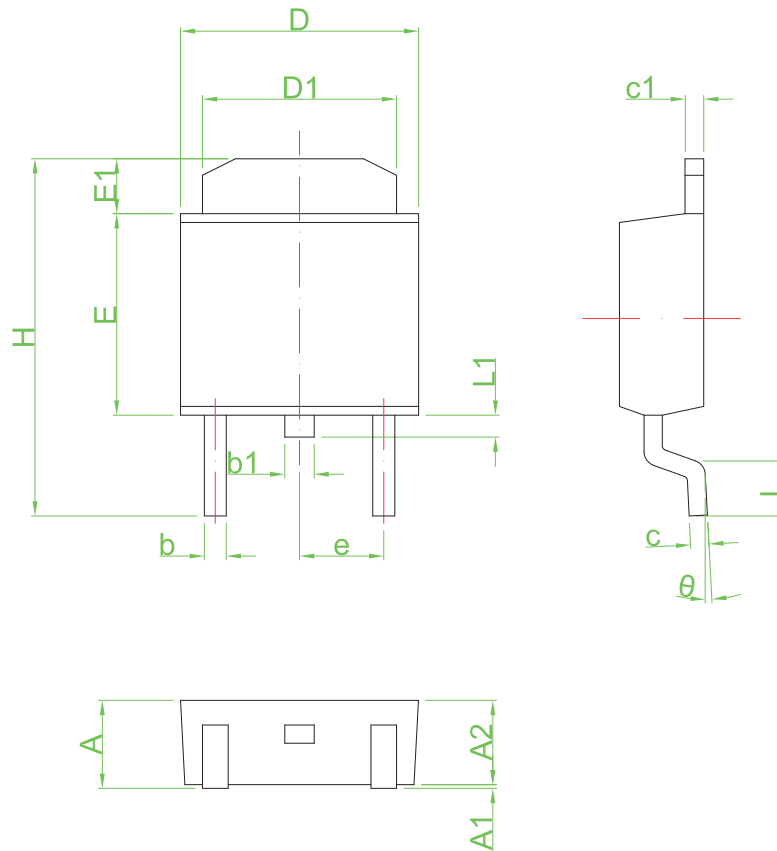
Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-30	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-24V, V_{GS}=0V$	---	---	-1	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.0	---	-2.5	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS}=-10V, I_D=-30A$	---	8	10.5	$m\Omega$
		$V_{GS}=-4.5V, I_D=-15A$	---	14	18.5	$m\Omega$
g_{fs}	Forward Transconductance	$V_{DS}=-5V, I_D=-30A$	---	26.4	---	S
Dynamic Characteristics ^⑤						
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=-15V, \text{Freq.}=1\text{MHz}$	---	3448	---	pF
C_{oss}	Output Capacitance		---	508	---	
C_{rss}	Reverse Transfer Capacitance		---	421	---	
$T_{d(on)}$	Turn-on Delay Time	$V_{DD}=-15V, V_{GS}=-10V, R_G=3.3\Omega, I_D=-15A$	---	8	---	nS
T_r	Turn-on Rise Time		---	17.8	---	
$T_{d(off)}$	Turn-off Delay Time		---	78.4	---	
T_f	Turn-off Fall Time		---	43.6	---	
Q_g	Total Gate Charge	$V_{DS}=-15V, V_{GS}=-4.5V, I_D=-15A$	---	33	---	nC
Q_{gs}	Gate-Source Charge		---	10.7	---	
Q_{gd}	Gate-Drain Charge		---	12.8	---	
Source-Drain Characteristics						
V_{SD} ^④	Diode Forward Voltage	$V_{GS}=0V, I_S=-1A, T_J=25^{\circ}\text{C}$	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	$I_F=-15A, di/dt=100A/\mu s, T_J=25^{\circ}\text{C}$	---	29	---	nS
Q_{rr}	Reverse Recovery Charge		---	15	---	nC

Note ④: Pulse test (pulse width 300us, duty cycle 2%).

Note ⑤: Guaranteed by design, not subject to production testing.

P-Channel Enhancement Mode MOSFET
Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance v.s Gate-Source

Fig.3 Forward Characteristics Of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ v.s T_J

Fig.6 Normalized $R_{DS(on)}$ v.s T_J

P-Channel Enhancement Mode MOSFET

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Waveform

P-Channel Enhancement Mode MOSFET
TO-252 Package Outline Dimensions


Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	2.25	2.65	0.089	0.104
A1	0.00	0.15	0.000	0.006
A2	2.20	2.40	0.087	0.094
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.46	0.66	0.018	0.026
c1	0.46	0.66	0.018	0.026
D	6.30	6.70	0.248	0.264
D1	5.20	5.40	0.205	0.213
E	5.30	5.70	0.209	0.224
E1	1.40	1.60	0.055	0.063
H	9.40	9.90	0.370	0.390
e	2.30 TYP		0.09 TYP	
L	1.40	1.77	0.055	0.070
L1	0.50	0.70	0.020	0.028
θ	0°	8°	0°	8°