

N-Channel Enhancement Mode MOSFET

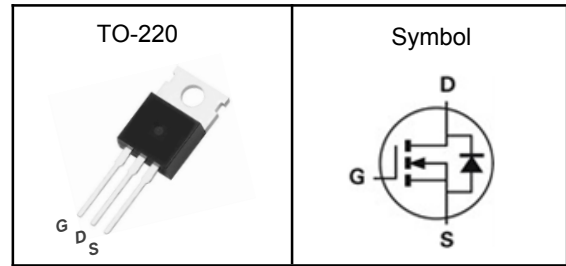
Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant
- 100% UIS and Rg Tested

Applications

- Power Management in Desktop Computer
- DC/DC Converters

Pin Description



V_{DSS}	100	V
$R_{DS(ON)-Typ}$	12	m Ω
I_D	41	A

Absolute Maximum Ratings ($T_J=25^\circ\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
V_{DSS}	Drain-Source Voltage	100	V
V_{GSS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy ^③	5	mJ
$I_{DM}^{①}$	Pulse Drain Current Tested	71	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	W

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	62	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ^①	1.5	$^\circ\text{C}/\text{W}$

Note ① : Max. current is limited by bonding wire.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C .

Note ③ : Surface Mounted on 1in^2 FR-4 board with 1oz.



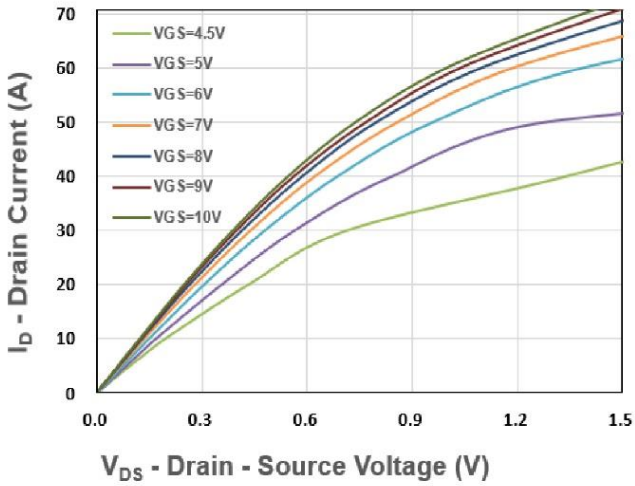
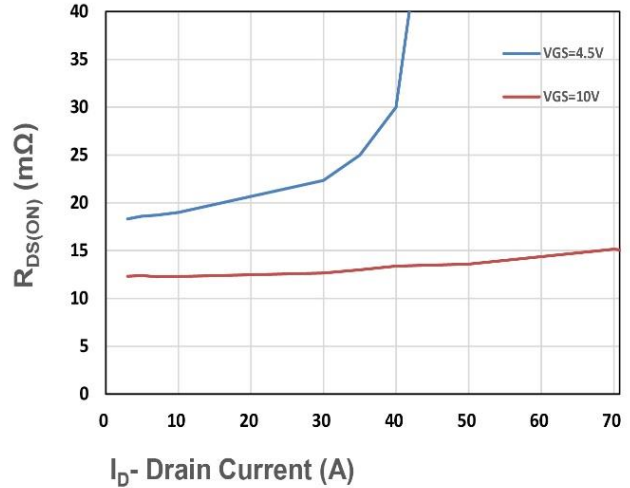
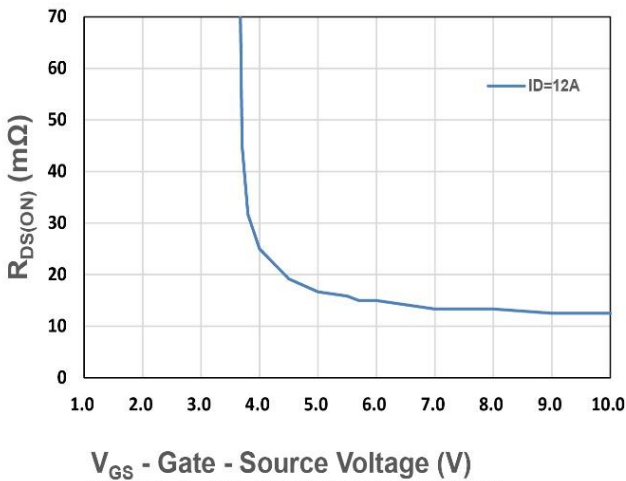
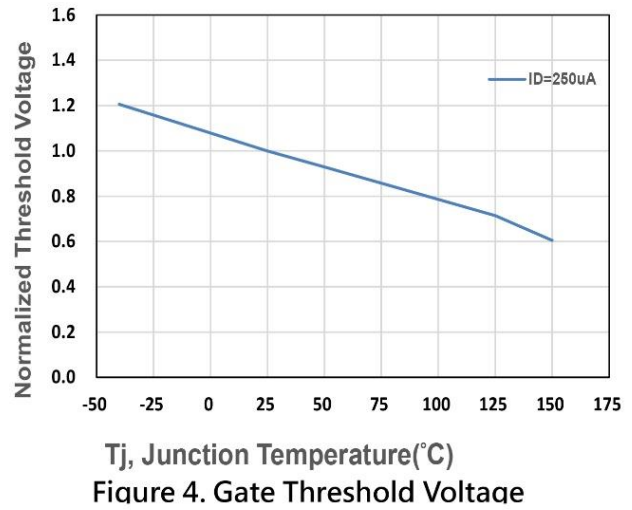
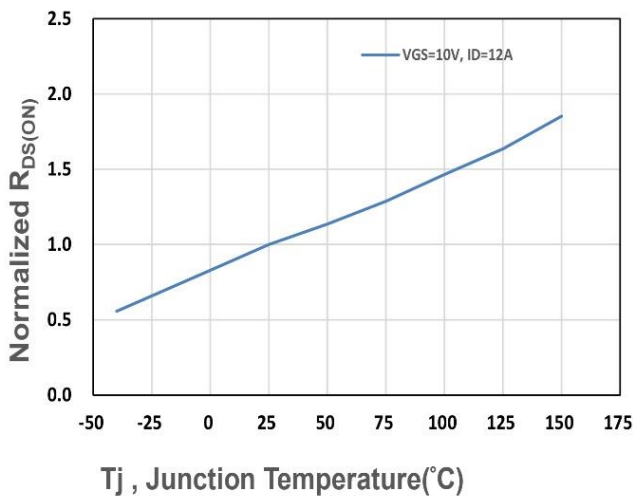
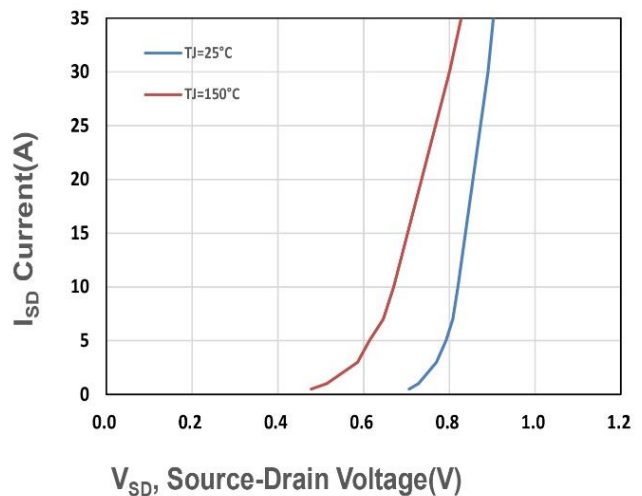
N-Channel Enhancement Mode MOSFET

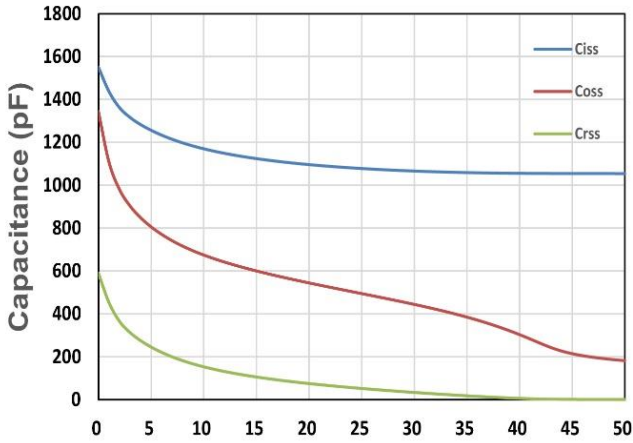
Electrical Characteristics ($T_J=25^{\circ}\text{C}$, Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	100	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=80V, V_{GS}=0V$	---	---	1	μA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1	2	3	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	± 100	nA
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS}=10V, I_D=12A$	---	12	15	$m\Omega$
		$V_{GS}=4.5V, I_D=8A$	---	18	24	$m\Omega$
Dynamic Characteristics ^⑤						
C_{iss}	Input Capacitance	$V_{GS}=0V, V_{DS}=50V, \text{Freq.}=1\text{MHz}$	---	1065	---	pF
C_{oss}	Output Capacitance		---	182	---	
C_{rss}	Reverse Transfer Capacitance		---	5	---	
$T_{d(on)}$	Turn-on Delay Time	$V_{DD}=50V, V_{GS}=10V, R_G=3\Omega, I_D=1A$	---	6	---	nS
T_r	Turn-on Rise Time		---	15	---	
$T_{d(off)}$	Turn-off Delay Time		---	16	---	
T_f	Turn-off Fall Time		---	25	---	
R_g	Gate Resistance	$V_{DS}=0V, V_{GS}=0V, f=1\text{MHz}$	---	3	---	Ω
Q_g	Total Gate Charge	$V_{DS}=50V, V_{GS}=10V, I_D=12A$	---	22.5	---	nC
Q_{gs}	Gate-Source Charge		---	3.2	---	
Q_{gd}	Gate-Drain Charge		---	7.6	---	
Source-Drain Characteristics ($T_J=25^{\circ}\text{C}$)						
V_{SD} ^④	Diode Forward Voltage	$I_S=20A, V_{GS}=0V$	---	0.85	1.1	V
t_{rr}	Reverse Recovery Time	$I_F=20A, V_R=50V, di/dt=100A/\mu s, T_J=25^{\circ}\text{C}$	---	40	---	nS
Q_{rr}	Reverse Recovery Charge		---	59	---	nC

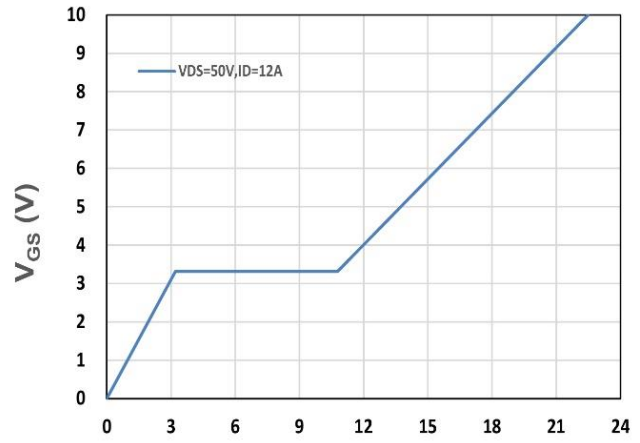
Note ④ : Pulse test (pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$).

Note ⑤ : Guaranteed by design, not subject to production testing.

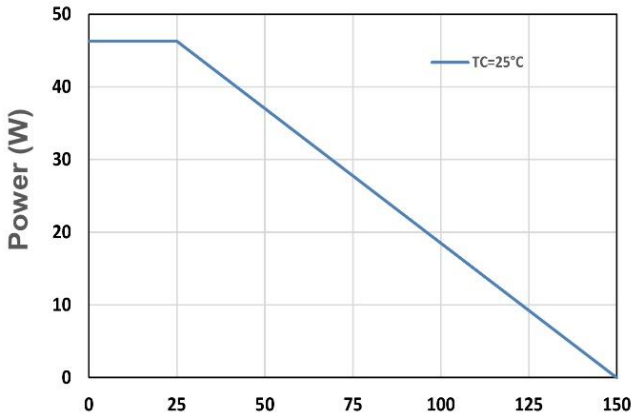
N-Channel Enhancement Mode MOSFET
Typical Characteristics

Figure 1. Output Characteristics

Figure 2. On-Resistance vs. ID

Figure 3. On-Resistance vs. VGS

Figure 4. Gate Threshold Voltage

Figure 5. Drain-Source On Resistance

Figure 6. Source-Drain Diode Forward

N-Channel Enhancement Mode MOSFET


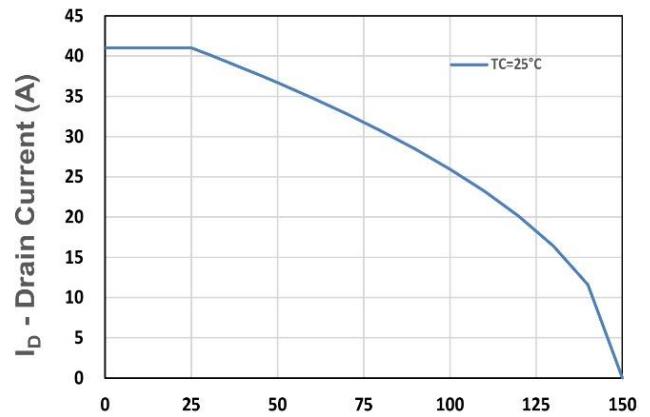
V_{DS} - Drain - Source Voltage (V)
Figure 7. Capacitance



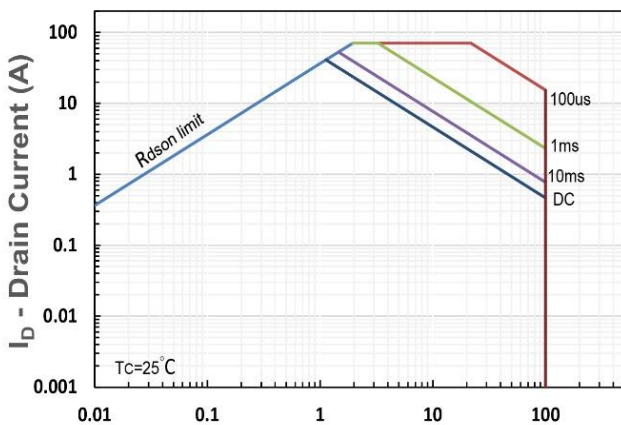
Q_g , Total Gate Charge (nC)
Figure 8. Gate Charge Characteristics



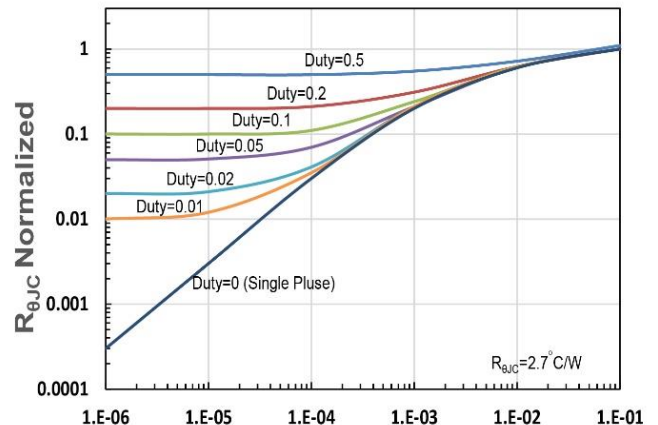
T_j - Junction Temperature (°C)
Figure 9. Power Dissipation



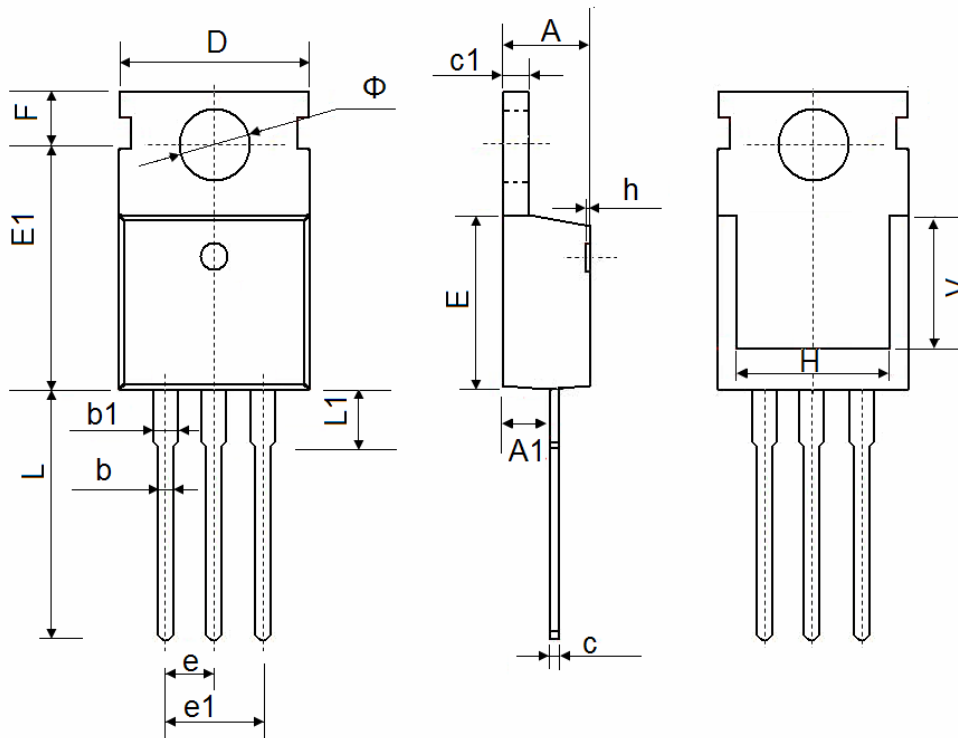
T_j - Junction Temperature (°C)
Figure 10. Drain Current



V_{DS} - Drain-Source Voltage (V)
Figure 11. Safe Operating Area



t_1 , Square Wave Pulse Duration(s)
Figure 12. $R_{\theta Jc}$ Transient Thermal Impedance

N-Channel Enhancement Mode MOSFET
TO-220 Package Outline Data


Symbol	Dimensions In Millimeters	
	Min.	Max.
A	4.350	4.650
A1	2.250	2.550
b	0.710	0.910
b1	1.170	1.400
c	0.330	0.650
c1	1.200	1.400
D	9.910	10.250
E	8.9500	9.750
E1	12.650	12.950
e	2.540 TYP.	
e1	4.980	5.180
F	2.650	2.950
H	7.900	8.100
h	0.000	0.300
L	12.700	13.500
L1	2.850	3.250
V	7.500 REF.	
Φ	3.400	3.800